

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT) (3)

(51) International Patent Classification <sup>5</sup> :  H04J 3/12		A1	(11) International Publication Number: WO 93/25017  (43) International Publication Date: 9 December 1993 (09.12.93)
(21) International Application Number: PCT/FI93/00176 (22) International Filing Date: 23 April 1993 (23.04.93) (30) Priority data: 922354                      22 May 1992 (22.05.92)                      FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only) : HURME, Harri [FI/FI]; Kaskenkaatantie 18 C 32, FIN-02100 Espoo (FI). BERGMAN, Lauri [FI/FI]; Urheilukatu 18 B 11, FIN-05800 Hyvinkää (FI).		(74) Agent: OY KOLSTER AB; Stora Robertsgatan 23, P.O. Box 148, FIN-00121 Helsinki (FI). (81) Designated States: AT, AU, BB, BG, BR, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: METHOD FOR TRANSFERRING ANCILLARY INFORMATION IN A BASIC TIME-DIVISION MULTIPLEX SYSTEM

## (57) Abstract

The invention relates to a method for transferring ancillary information, such as channel-associated signalling and alarms in a basic time-division multiplex system, where ancillary information is transferred in a predetermined timeslot (TS16) of each frame, and where information associated with more than one channel is transferred in at least one timeslot (TS1...TS15, TS17...TS31) of the basic system. To provide a method allowing the ancillary information, particularly signalling and alarms, to be transferred with as high compatibility as possible in a conventional basic multiplex system up to a capacity of 120 speech channels, a superframe (12) having the length of several multiframes (11) is assembled, and at least part of the ancillary information is transferred in said predetermined timeslot (TS16) so that the number of the multiframe is transmitted in addition to said ancillary information, the number indicating with which channel the ancillary information is associated.

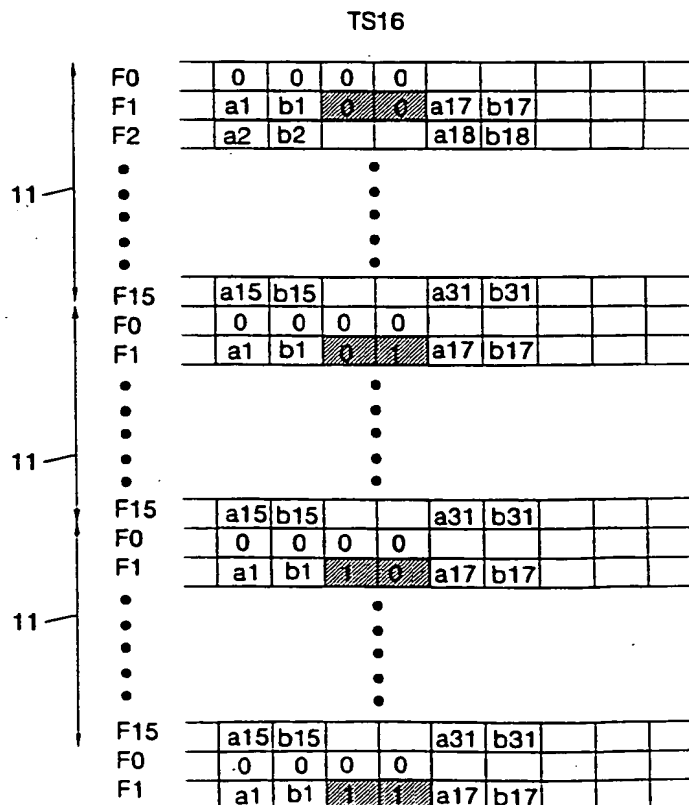

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

Method for transferring ancillary information in a basic time-division multiplex system

5       The invention relates to a method for transferring ancillary information, such as channel-associated signalling, in a basic time-division multiplex system, where ancillary information is transferred in a predetermined timeslot of each frame, and where information associated with more than one  
10       channel is transferred in at least one timeslot of the basic system. The method according to the invention is especially intended for use in connection with the European 2048 kbit/s 30-channel basic multiplex system, but it is not restricted to this standard  
15       only.

      In the 2048 kbit/s basic multiplex system defined in the CCITT specification G.704, channel-associated signalling CAS is transferred in a timeslot TS16 by grouping successive frames into larger multi-frames containing 16 frames. The timeslots TS16 of  
20       successive frames in the multiframe are assigned one at a time to a signalling channel corresponding to two separate speech channels. Accordingly, there are four bits available for each signalling channel in the  
25       timeslot. The signalling channels occupy the timeslots TS16 of fifteen frames contained in the multiframe. The timeslot TS16 of the remaining frame 0 contains e.g. a multiframe synchronizing signal, as will be described below.

30       The basic system described above allows the transfer of 30 speech channels having a capacity of 64 kbit/s. Today, however, it is possible to use advanced speech coding methods by which the capacity of the 2048 kbit/s system can be increased up to 60 or even  
35       120 speech channels. In such a case it is necessary to

code the information of the speech channels by a transcoder.

The CCITT specification G.761 defines a 32 kbit/s ADPCM transcoder with accurately specified fixed timeslot mapping, signalling transfer and alarms handling. This transcoder cannot, however, be connected to the 2048 kbit/s basic system as the bits it employs for alarm transfer are reserved for national use in the specification G.704. A reliable transfer of alarms cannot therefore be guaranteed.

On the other hand, even though the CCITT specifications G.726 and G.727 define 16 kbit/s speech coding, a transcoder realizing it has not yet been specified. One reason for this is that the transfer capacity of the timeslots TS0 and TS16 is not adequate for conventional transfer of the channel-associated signalling of 120 channels.

The specification G.761 also defines alarms, such as forward and backward AIS (Alarm Indication Signal) alarms. However, the approach defined in the specification is not feasible when using a 16 kbit/s codec as the number of available bits is not sufficient for the transfer of alarms. This is because the network management also utilizes free bits available in the timeslot TS0, wherefore they are not available for the purpose specified in G.761.

The object of the present invention is to provide a method which avoids the above-mentioned shortcomings and allows the transfer of ancillary information, especially the transfer of signalling and alarms, in a conventional basic multiplex system up to a capacity of 120 speech channels. This is achieved by means of a method according to the invention which is characterized by assembling a superframe having a length of several multiframes, at least part of the

ancillary information being transferred in said predetermined timeslot so that the number of the multiframe is transmitted in addition to said ancillary information, the number indicating with which  
5 channel the ancillary information is associated.

The basic idea of the invention is to employ a lower signalling rate and to utilize the "extra" bits remaining in the timeslot transferring channel-associated ancillary information as "address bits"  
10 indicating which one of the transfer connections is being served.

According to a preferred embodiment of the invention, part of the ancillary information is transferred by changing the sequence of the multiframe  
15 numbers. The idea is thus to utilize the sequence of the multiframe numbers or a change in the sequence for transferring part of the ancillary information, such as alarms. It is to be noted that even though the term *superframe* will be used in the text below to  
20 illustrate the operation of the method to the reader, the operation of the method as such does not require a single superframe sync in all timeslots but the phase or sequence of the multiframe numbers may vary from one timeslot to another.

25 The solution according to the invention is also compatible with  $n \times 2048$  kbit/s networks as the "address bits" used in the invention eliminate delay deviations (the delay varies from one timeslot to another) occurring in cross-connect devices.

30 A further advantage of the invention is that the bits of the timeslot TS0 normally used for the network management are not utilized but they are still available for the network management purposes, as distinct from e.g. the above-mentioned specification G.761,  
35 where they are used for another purpose.

In the following the invention will be described in more detail with reference to the examples shown in the attached drawings, in which

Figure 1 illustrates the assembly of superframes from multiframes;

Figure 2 illustrates the transfer of ancillary information in the timeslot TS16 in successive multi- and superframes;

Figure 3 is a block diagram illustrating a transmitter section in a codec applying the method according to the invention; and

Figure 4 is a block diagram illustrating a receiver section in a codec applying the method according to the invention.

In the following, a 2048 kbit/s basic multiplex system transferring 120 speech channels by a 16 kbit/s speech coder will be used as an example. Each speech channel timeslot (the timeslots TS1...TS15 and the timeslots TS17...TS31) thus contains 4 coded speech channels.

Figure 1 shows a frame 10 in a basic multiplex system. The frame 10 comprises 32 timeslots TS0...TS31. As is well-known, the timeslot TS16 of the frame is used by two signalling channels so that there are four bits abcd available for each channel. In the system, sixteen successive frames F0...F15 form a multiframe 11 having a length of 2 ms. In a conventional system, service can thus be offered for 30 speech channels.

In a multiplexer providing conventional telephone service, the number of signalling bits actually transferred per channel can be reduced to two (the bits a and b hereinbelow). The other bits (the bits c and d hereinbelow) are typically connected to a fixed state, and so it is not normally necessary to send

them at all.

According to the invention, a superframe structure of four multiframes and having a length of 8 ms is assembled from the 16-frame multiframes 11. The  
5 above-mentioned bits c and d are used in such a manner that the transmitter unit always sends not only the actual signalling bits a and b but also the bits c and d indicating the number (1...4) of the multiframe in the superframe. This number indicates which one of the  
10 speech channels is being served currently, that is, the receiver employs the "address bits" c and d to update the signalling data of the appropriate speech channel. The signalling data of only one of the four speech channels is updated during the multiframe, and  
15 so the signalling of all speech channels will be updated once only after the superframe. In the arrangement according to the invention, the updating sync is thus reduced from the normal value of 2 ms (multiframe sync) to 8 ms. (When using a 32 kbit/s coder, the  
20 updating sync is correspondingly 4 ms.) In practice, the reduction of the sync even to one quarter of the original has no detrimental effects, as even a slower rate is adequate for normal telephone network signalling.

25 Figure 2 illustrates channel-associated signalling for the timeslot TS1. This is done by showing the content of the timeslots TS16 (there are 64 such timeslots in the superframe 12) in those of the successive frames where the signalling data of the timeslot TS1 is transferred. The third and fourth bit  
30 in the timeslot TS16 in the second frame F1 of each multiframe 11, that is, the above-described bits c and d indicate by the number (00, 01, 10 or 11) of the multiframe 11 to which speech channel of the timeslot TS1 the corresponding bits a1 and b1 are assigned.  
35

Figure 2 further shows the first four bits abcd of the timeslot TS16 of the first frame F0 of each multi-frame. These bits form the synchronizing signal, being all zeros. Correspondingly, the bits c and d (not shown) following the bits a17 and b17, for instance, indicate to which one of the four speech channels of the timeslot TS17 the bits are assigned. In the timeslot TS1 the bits cd form a sequence 00, 01, 10, 11, as described above. The superframe structure according to the invention may be incoherent, that is, the phase of the respective "1-4 counter" may be different in each timeslot.

According to the preferred embodiment of the invention, the cyclically changing bits c and d are used for the transfer of alarms so that a certain normal cd bit sequence, such as the above-described normal-state sequence 00, 01, 10, 11, is replaced with another sequence in an alarm situation. There are six ( $4!/4$ ) possible sequences; in practice, this is sufficient for the transfer of all required alarms. Some alarms, such as the forward AIS alarm, can be given so that the bits c and d become fixed (e.g. 10). In other words, the number of the multiframe stops rotating intermittently. In such a case the signalling does not, of course, take place as described above; in an alarm situation, however, this is not significant.

Figures 3 and 4 show one way of realizing a codec so as to apply the method according to the invention. These embodiments correspond to the Applicant's ADPCM codec, which is a member of the product family sold under the name DYNACARD™.

In Figure 3, the input of the transmitter section 30 comprises a line interface circuit 31 where a data signal and a clock signal are separated from the incoming PCM signal  $PCM_{in}$ . The data and clock



signal are then transferred to corresponding inputs in a demultiplexer unit 32. In the demultiplexer unit, the signalling bits to be transferred in the timeslot TS16 are separated and applied to a copying unit 35.

5 In addition, data is applied from the demultiplexer unit to a coder unit 33, and a frame synchronizing signal is applied to a coder control unit 36 which informs the coder of the coding rate (64/32/16 kbit/s) used in the system. The c and d bits of the incoming

10 signal are eliminated in the copying unit 35. Coded data (speech) and signalling data from the copying unit (from which the original c and d bits have been removed) are connected to a cross-connect circuit 34 which rearranges the timeslots to an outbound bus TX

15 BUS. The signalling output of the cross-connect circuit comprises a sequence changing means 38 for the bits cd in which new signalling bits c and d are added to the signalling data. The sequence changing means changes the normal sequence of the cd bits to another

20 sequence (under the control of a processor unit 37) if an alarm has to be transferred. The sequence changing means is controlled by a cd bit sequence generator which is a counter stepping forward at intervals of one multiframe (and being reset at intervals of one

25 superframe). The sequence generator derives the multiframe sync from the bus.

On the receiver side (Figure 4) data (speech) and signalling is obtained from a receiver bus RX-BUS to the corresponding inputs in a cross-connect block

30 41. The cross-connect block arranges the timeslots under the control of a processor unit 47 according to the user's selections, and applies the speech data to a decoder unit 42, the signalling bits a and b to a multiplexing unit 43, and the bits c and d to a

35 comparison block 45. Each received speech channel is

ADPCM decoded into a normal PCM speech channel. This requires channel-associated control data which is so generic that the internal cross-connect data of the timeslot can also be disassembled on the basis of it.

5 This also produces local c and d bits. The comparison block 45 compares the locally generated c and d bits with the received c and d bits. If they match, the comparison block applies an enable signal to the multiplexer. The enable signal updates the signalling

10 memory in the memory of the multiplexer unit 43 for this particular channel. If the received cd bits and the locally generated cd bits do not match, the signalling of the channel is maintained unchanged until the comparison indicates that the cd bits match.

15 The comparison block also determines whether the sequence of the cd bits is normal or whether it indicates an alarm. The processor unit 47 selects the timeslot to be monitored.

Accordingly, it is not necessary to get locked

20 to the superframe on the receiver side but the receiver uses received signalling bits to update the signalling information of the appropriate speech channel.

After ancillary information has been transferred

25 as described above between the transmitter and receiver sections, a conventional PCM signal  $PCM_{out}$  where the bits c and d are fixed can again be produced at the output of the receiver unit. For this purpose, the processor unit 47 assigns the multiplexer unit 43 with

30 fixed cd bits  $cd_{out}$ . However, if some of the timeslots are not decoded in the decoder 42, the c and d bits can be connected forward.

The method according to the invention can, of course, be realized by various different device configurations.

35 However, only some minor modifications

are required in existing devices, mainly means for providing a freely rotating two-bit multiframe counter in the transmitter section for the signalling bits.

5        Even though the invention has been described  
above with reference to the example shown in the  
attached drawings, it is clear that the invention is  
not restricted to it but it can be modified in many  
ways within the inventive idea disclosed above and in  
10       the accompanying claims. Even though the invention has  
been described above with reference to an example in  
which the signalling and alarms of 120 speech channels  
are transferred, the invention also has other applica-  
tions. In place of the speech connections it is  
possible to transfer 16 kbit/s data channels with  
15       other associated information. The number of channels  
may also be e.g. 60, so that the superframe can be  
formed of only two multiframes. As already mentioned  
in the beginning, the inventive idea is not restricted  
to the European 2048 kbit/s basic multiplex system but  
20       the invention can also be applied to other systems of  
the same type.

## Claims:

1. Method for transferring ancillary information, such as channel-associated signalling in a basic time-division multiplex system, where ancillary information is transferred in a predetermined timeslot (TS16) of each frame, and where information associated with more than one channel is transferred in at least one timeslot (TS1...TS15, TS17...TS31) of the basic system, characterized by assembling a superframe (12) having a length of several multiframes (11), at least part of the ancillary information being transferred in said predetermined timeslot (TS16) so that the number of the multiframe is transmitted in addition to said ancillary information, said number indicating with which channel the ancillary information is associated.

2. Method according to claim 1, characterized in that part of the ancillary information is transferred by changing the sequence of the multiframe numbers.

3. Method according to claim 1 or 2, characterized in that the assembled superframe is incoherent so that the phase of the superframe is different in different timeslots.



4. Method according to any of claims 1 to 3, characterized in that the superframe is assembled from four multiframes.

5. Method according to any of claims 1 to 3, characterized in that the superframe is assembled from two multiframes.

6. Method according to any of the preceding claims 2 to 5, characterized in that part of the ancillary information is transferred by

11

changing the bits (c and d) indicating the number of the multiframe (11) into fixed bits.

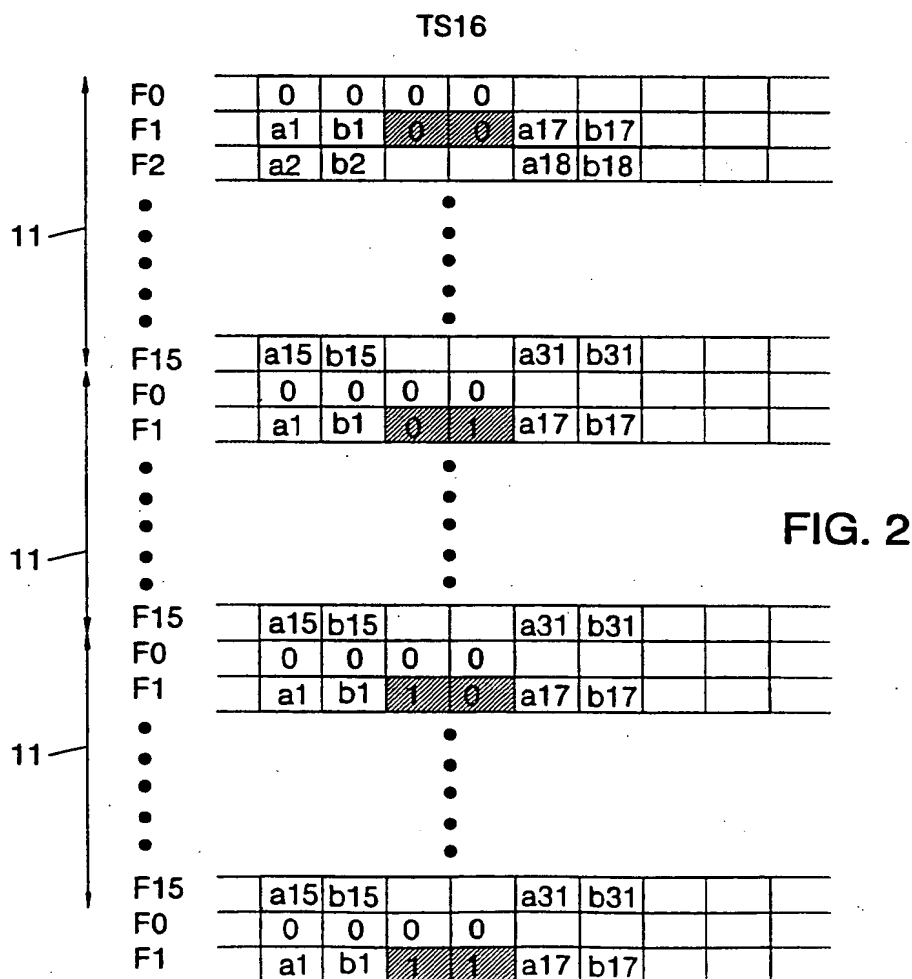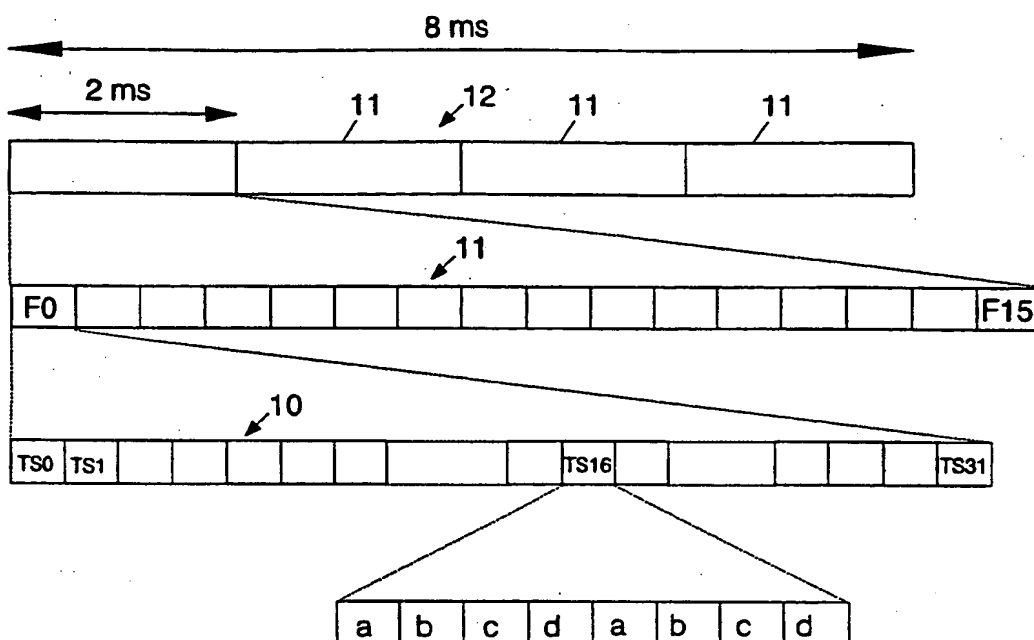


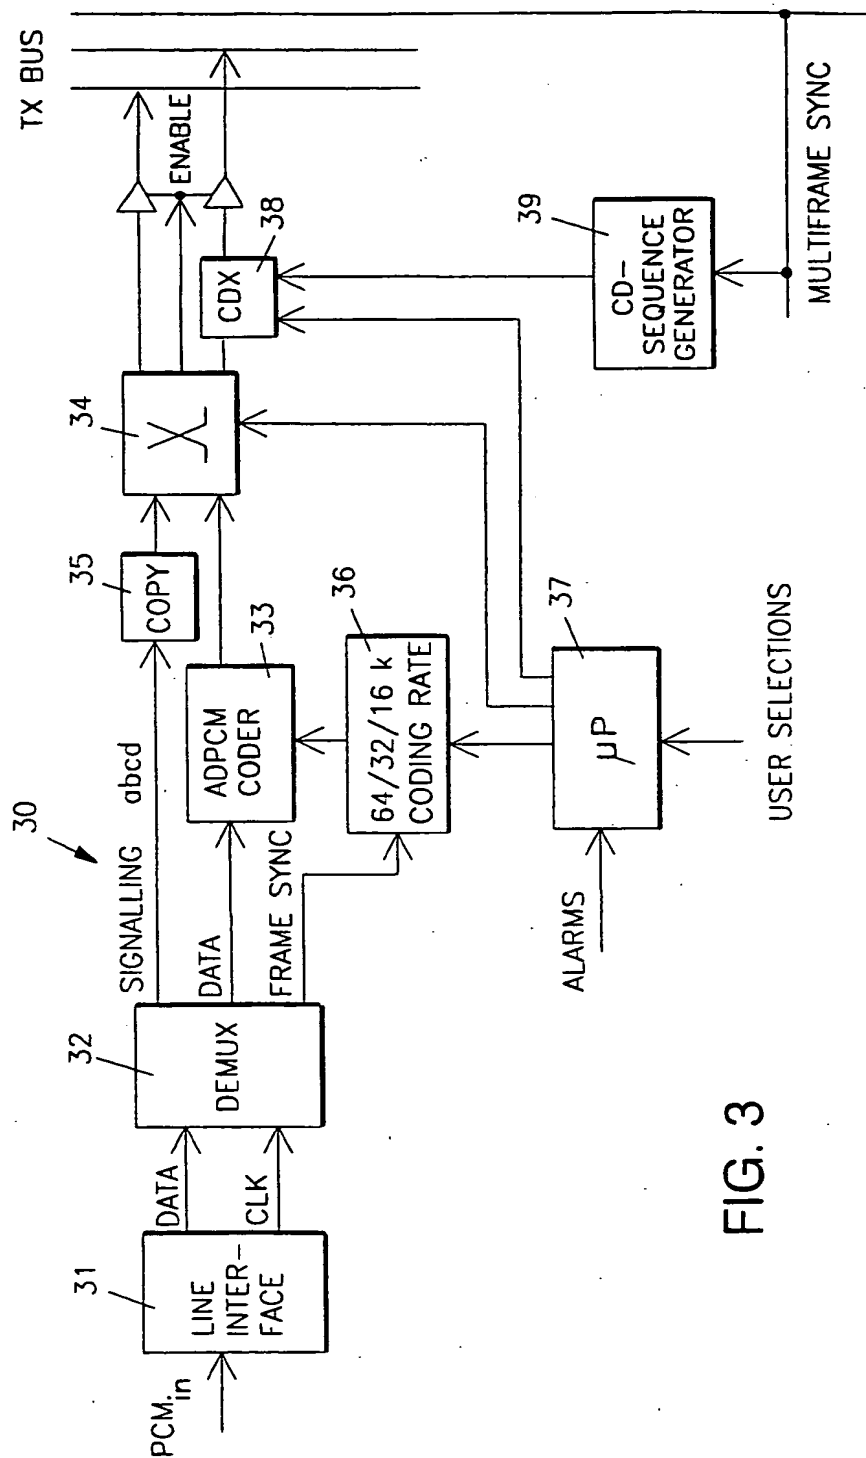


FIG. 3



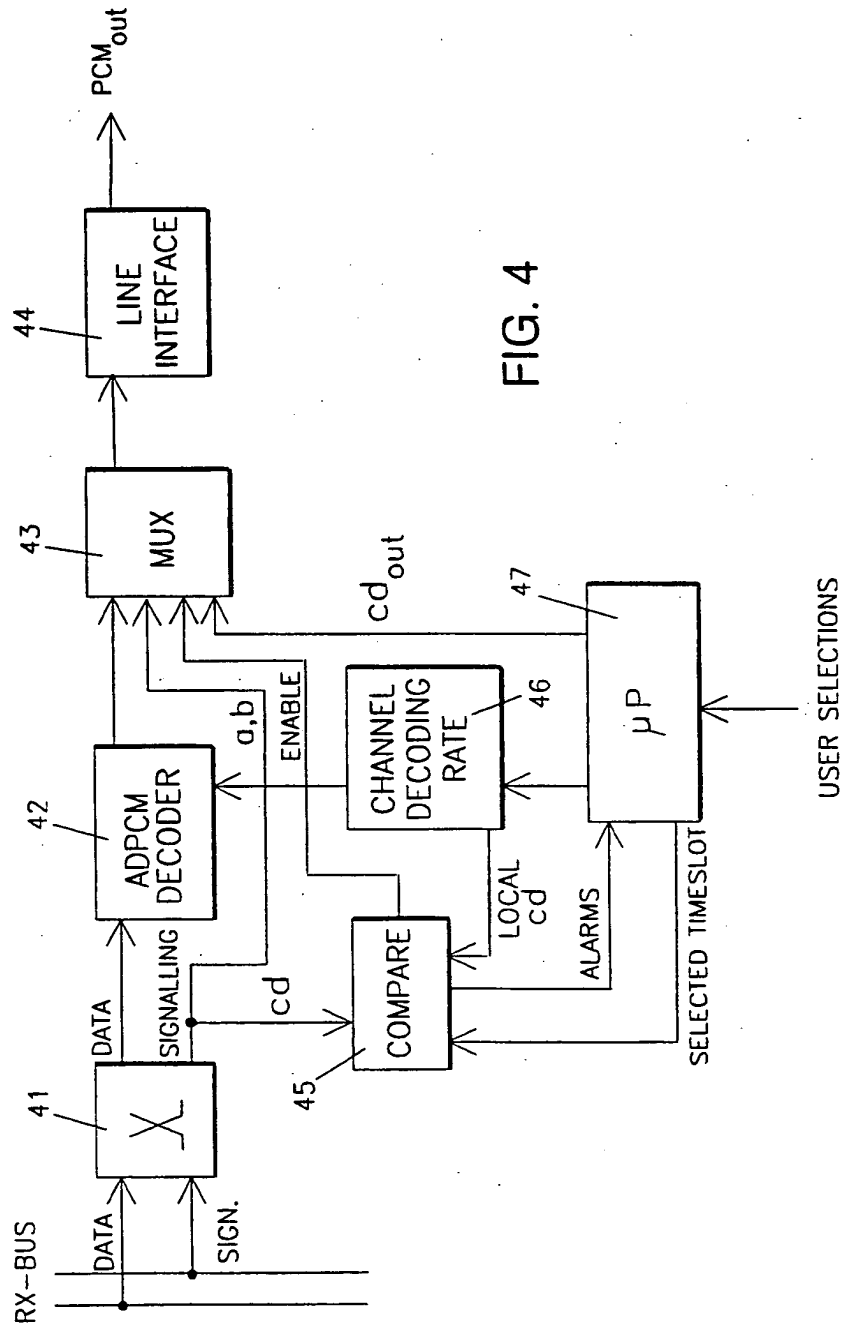

PCT/FI 93/00176

## IPC5: H04J 3/12

### B. FIELDS SEARCHED

IPC5: H04J, H04L, H04M, H04Q

SE,DK,FI,NO classes as above

ORBIT: WPAT

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US, A, 4358845 (GUY A.M. DE PASSOZ),            9 November 1982 (09.11.82), column 1,            line 7 - column 2, line 12; column 5,            line 31 - line 55, figure 5</p> <p style="text-align: center;">--            -----</p> <p style="text-align: right; font-weight: bold;">BEST AVAILABLE COPY</p>	1

**BEST AVAILABLE COPY**

☐ Further documents are listed in the continuation of Box C.

**X** See patent family annex.

- \* Special categories of cited documents
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

12 August 1993

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

17 -08- 1993

**Authorized officer**

**Magnus Stiebe**  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

### Information on patent family members

02/07/93

International application No.

PCT/FI 93/00176

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4358845	09/11/82	NONE	